PURIN®

Innovation for humanity,
responsibility for nature.



PURIN® AQUA

M M

Prioritizing science

Adopting an innovative approach

Adopting agile management

Solution-oriented

PURIN®

Team with a leader spirit

High motivation at work

Globalization

Caring about sustainability

M M M

- To prioritize the scientific approach in studies,
- To ensure continuity in innovative products,
- To be an excellent team with high communication power,
- To provide values that will make a difference to the sector,
- To be focused on continuous learning and continuous improvement.

M

To increase our product range in this field by focusing on innovative and environmentally friendly product designs and to leave a better world to future generations while making our living spaces more comfortable.

O M

PURIN is a brand that responds quickly to the requests of its customers, offers direct technical support with its experience and expertise, and has a "win to win" relationship with all its partners.

M

For any environment that affects human life, we work with you and for you to prepare a bright future for generations to come by offering innovative, environmentally friendly, and safe products manu-factured with utmost attention and care by Purin working relentlessly.

+20 Export to Country

+50.000 tons/year Production Capacity

+20 Large Scale Project

Engineering and Equipment Services

PURIN® Aqua


When water-based polyurethane dispersions are compared with polyurethanes prepared with solvents; It has superior performance properties such as suitable viscosity, flexibility, non-toxicity, non-flammability, high mechanical resistance, stability over a wide temperature range. Different coatings and glues are used in many areas such as textile, technical textile, shoes, leather, sponge, sandpaper, EVA, furniture, floor coating, insulation membranes etc. The chemical structures of the products are important for the selection of these dispersions.



PURIN® Aqua

PURINATE

PURINCOAT PURINADHE PURINSEAL PURINELAS

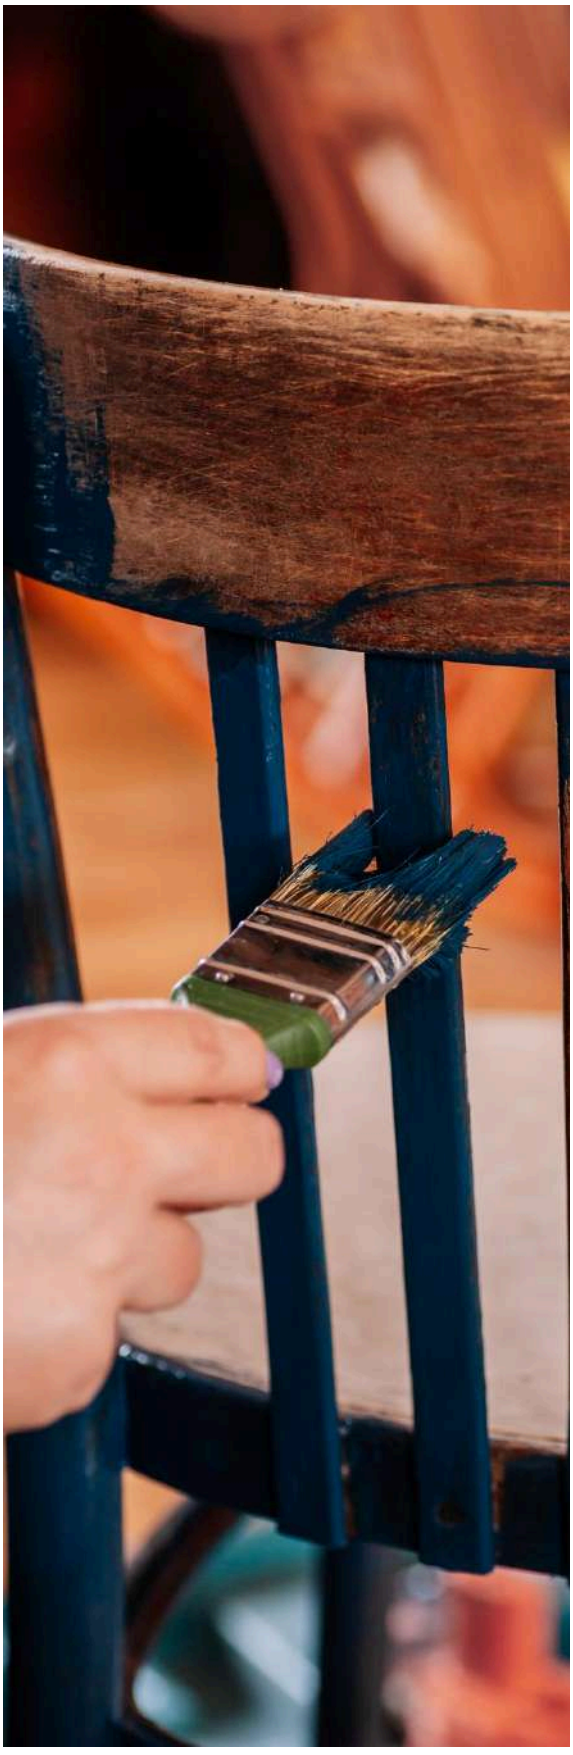

As important as water is for our survival, it is also dangerous. We must provide all the necessary conditions for a sustainable life by using science and technology. On the one hand, we should pay attention to the careful and proper use of water, and on the other hand, we should prevent its harm to us. The lifespan of our buildings, where we and our loved ones are the safest, is shortened as a result of contact with water.




Eco - Friendly, User - Friendly

- Water-based
- Low Viscosity
- Isocyanate free polyurethane

ab a a a a

Concrete structures will allow water to pass into the interior. The irons that act as skeletons in concrete structures are subjected to rusting and loss of performance as a result of water contact. This makes it difficult for our buildings to stand. Therefore, waterproofing in buildings protects our lives and the lives of our loved ones.

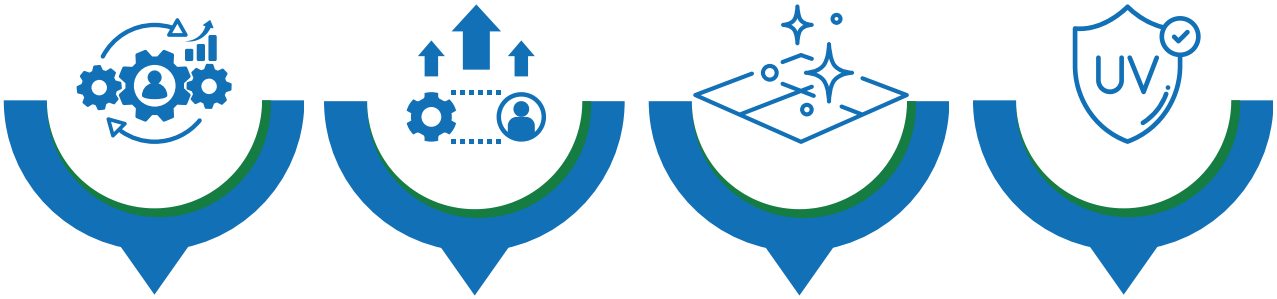

High Mechanical Performance

High Chemical Performance

Easy to Apply

UV Non Yellowing



- Water-based polyurethane dispersions (PUD) are used as adhesives and coatings in the following areas;




Furniture



textile



Marble / Ceramic



Wooden



Automotive



Leather



Construction




Shoes



Plastics / Composite

Application areas;

- Wood Flooring
- Kitchen Cabnets
- Furniture
- Interor Doors and Windows
- Exterior Wood

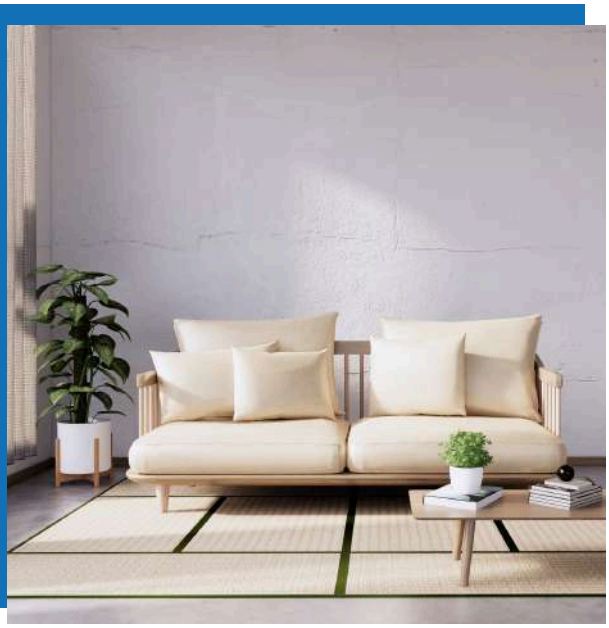



There is a variety of water-based polyurethane resin options for wood coating applications on wood and furniture end-use market. Finding the optimal technology requires a thorough understanding of not only resin properties, but also the applications in which the wood coatings will ultimately be used, such as flooring, cabinetry, furniture, interior windows and doors, and exterior wood.



Roof Coatings

Polyurethane dispersion is used in the production of waterproofing membranes in the construction industry with its strong hydrolysis resistance and high elasticity.

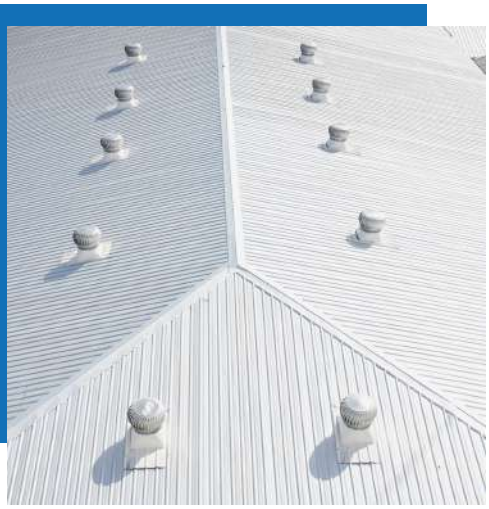

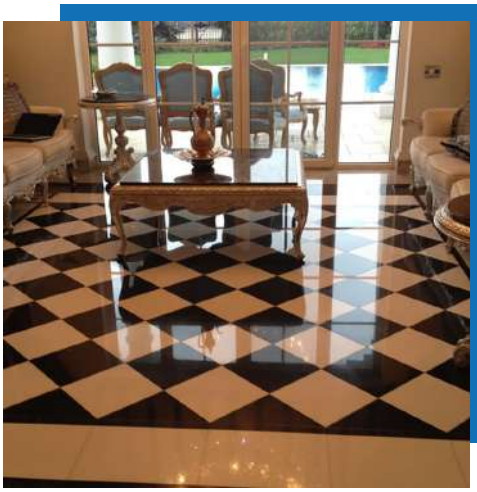

Ceramic Coatings


They are transparent, semi-flexible, ready-to-use, resistant to sunlight, long-lasting waterproofing material that is not affected by external weather conditions.

Ceramic, glass, mosaic. faience and porcelain surfaces Granite, marble, brick, PVC surfaces Balcony, terrace, bathroom and kitchen floors and walls



T TT

Textile coatings are applied to a material to modify, enhance or improve its properties. Polyurethane coatings are preferred in many areas such as artificial leather, real leather, raincoats, work clothes, tents and tarpaulins, sportswear and shoe textiles.

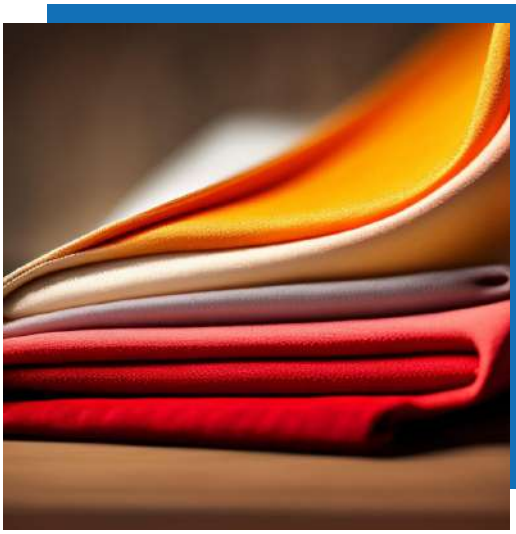

Application areas;

- Real Leather
- Artificial Leather
- Textile Printing



Application Technique;

Membrane press adhesive is an adhesive system with some special additives added to the waterbased polyurethane dispersion used in the bonding process of MDF materials and PVC foils with the help of balloon and vacuum membrane press machines.



How to Apply



Initially, the glue is sprayed onto the MDF material, and once the surface dries, the MDF plates are positioned on the vacuum machine. These plates are then allowed to sit, permitting the water in the glue to evaporate. Next, the desired design is positioned on the PVC foil, and the machine heats the PVC foil until it becomes flexible from its rigid state. Once the PVC foil reaches the desired temperature, the vacuum is activated, pulling the foil onto the MDF.

As the PVC foil heats up, the dried glue on the MDF surface melts, facilitating adhesion between the MDF and PVC foil due to the adhesive properties of the molten glue. Subsequently, the vacuum is deactivated, and the coated MDF boards are obtained.

Fuspet Glues

It is the lamination of textile or leather with the fuspet sponge on the sole of the shoe, which we call fuspet glue. Thanks to water-based polyurethane glues, you can achieve fast drying in these product groups. These glues, which are called environmentally friendly products because they do not contain solvents, will provide you with great advantages both during production and after laminate processes.





Shoe Glues

These products are used for sticking the shoe upper to the sole; applied separately to the upper and sole.




Application Technique;

Lamination process, which is one of the most important applications in the textile industry, is the most critical quality element of the final product. For this quality, superior adhesion strength and washing resistance are the two priority parameters required in lamination processes.



How to Apply


- Water-based polyurethane glue is applied to the relevant surface (textile or other materials) in a certain amount by spray, roller or doctor blade method.
- By passing the glued surface through an oven, the water in the glue is removed and the polyurethane resin dissolved in the water is revealed.
- The resulting polyurethane resin will be in a soft and sticky form due to the temperature. The second material to be laminated is applied with the help of a roller.
- Then, the materials that are laminated to each other are passed through the cooling rollers, and the polyurethane resin is cooled to a form that will show its original performance.

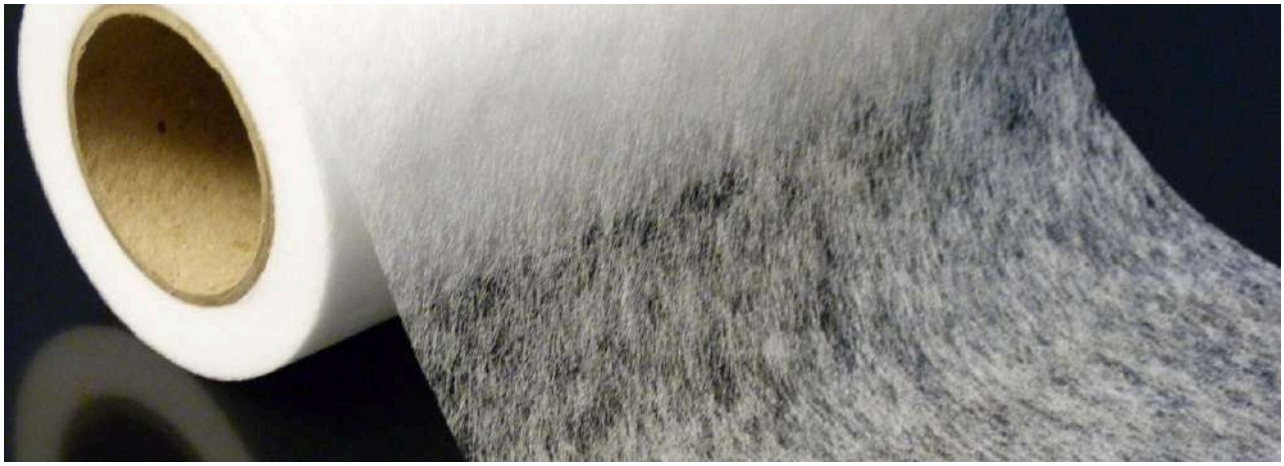


Sanding Lamination

These glues, which have very strong adhesion performance, form a soft film by providing excellent adhesion of the textile fabric to the sandpaper. Since the fabric is elastic, it provides permanent adhesion without deforming when the fabric is stretched after the lamination process. There are aromatic and water-based product groups offered to this sector.



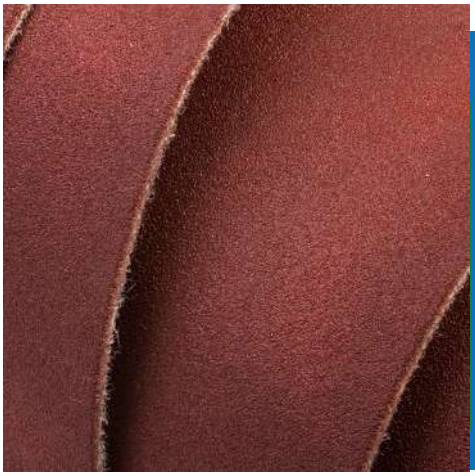

Sandpaper and glasspaper are names used for a type of coated abrasive that consists of sheets of paper or cloth with abrasive material glued to one face.

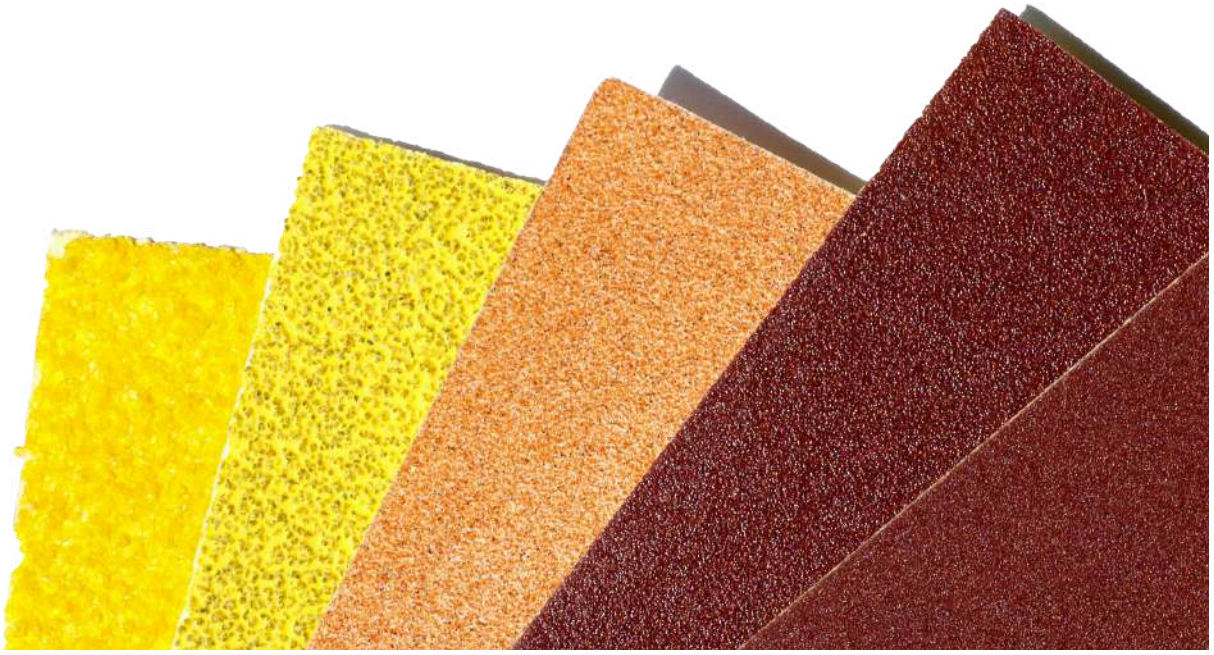

N NI I

PURINAQUA Product Table				
Products	Type	Elongation (%)	Viscosity (cP,23C)	Explanation
PURINAQUA DC 101	PCD	400-500	900	Polycarbonate polyol based anionic PUD
PURINAQUA FW 101	PES	70-140	<100	Low elastic PUD
PURINAQUA FW 102	PES	250-300	<100	Semi-elastic PUD
PURINAQUA FW 103	PES	600-700	<100	High-elastic PUD
PURINAQUA FW 201	PES	600-700	<100	OH-function PUD
PURINAQUA HA 101	PES	<1000	50 - 600	Heat-activated PUD, Solid %35
PURINAQUA HA 102	PES	<1000	50 - 600	Heat-activated PUD, Solid %35
PURINAQUA HA 103	PES	<1000	<1000	Heat-activated PUD, Solid %50
PURINAQUA HA 104	PES	<1000	<1000	Heat-activated PUD, Solid %40
PURINAQUA IC 103	PCD	300 - 400	2.500 - 3.500	Polycarbonate polyol based anionic PUD
PURINAQUA IC 104	PES	300-400	<100	PUD resin for glue
PURINAQUA MP 301	PES	600-800	<100	Membrane press glue resin
PURINAQUA PP 101	PES	600-800	<100	PUD resin
PURINAQUA PUD 101	PCD	300 - 400	50 - 300	Polycarbonate polyol based anionic PUD
PURINAQUA PUD 201	PE	700-900	50 - 300	Polyester based anionic PUD
PURINAQUA PUD 301	PES	600-800	50 - 600	Polyester based anionic PUD
PURINAQUA RM 701	PE	700-900	<100	Top coating
PURINAQUA RM 702	PES	500-700	<100	Top coating
PURINAQUA TC 101	PES	<1000	<2000	Textile coating
PURINAQUA TL 102	PES	<1000	1000-2000	Textile lamination PUD, Heat-activated
PURINAQUA XR 101	Cross-linking	-	1.400 - 2.200	Gloss effect hardener
PURINAQUA XR 102	Cross-linking	-	570 - 730	Matte effect hardener
PURINAQUA XR 103	Cross-linking	-	700 - 1.500	Semi-matte hardener

PURIN® Aqua



PURIN®

Innovation for humanity,
responsibility for nature.



Europe

KG PURIN GmbH

+49 172 739 60 97

Königsallee 92a, 40212
Düsseldorf Germany

Türkiye

PURIN Poliüretan Kimya

+90 262 372 20 15

Karadenizliler Mh.
Barbaros Cd. No:27 41140
Başiskele - Kocaeli / Türkiye

Contact Us

www.puringlobal.com

info@puringlobal.com

Visit our Website